


Ground blocks with screw connection

WKN 35 SL/U


- Ground block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 35 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 143
- Enclosed design

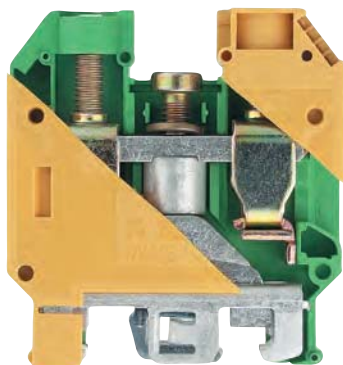

Description	Type	Part No.	Std. Pack
Ground block, green/yellow	WKN 35 SL/U	57.535.9055.0	20
General data			
Width / length / height, incl. TS 7.5	16 mm / 63 mm / 68 mm		
Wire strip length	20 mm		
Approvals	LR     KEMA 02 ATEX 2114 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	10–35 mm ²		10–35 mm ²
Cross section solid/stranded	10–50 mm ²		10–50 mm ²
Cross section, AWG		10–2	10–2
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

WKN 70 SL/U

- Ground block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 70 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 143
- Enclosed design

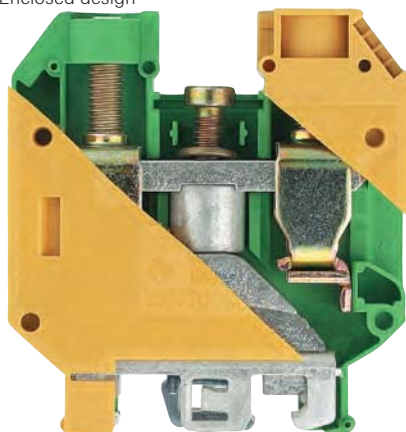

Description	Type	Part No.	Std. Pack
Ground block, green/yellow	WKN 70 SL/U	57.570.9055.0	20
General data			
Width / length / height, incl. TS 7.5	24 mm / 75 mm / 81 mm		
Wire strip length	24 mm		
Approvals	LR     KEMA 02 ATEX 2114 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	10–70 mm ²		10–70 mm ²
Cross section solid/stranded	16–95 mm ²		16–95 mm ²
Cross section, AWG		6–2/0	6–2/0
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		