


Ground blocks with screw connection

WT 2,5 PE

- Ground block with screw connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Connection capacity: 2 wires, equal size 0.14 – 1.5 mm²

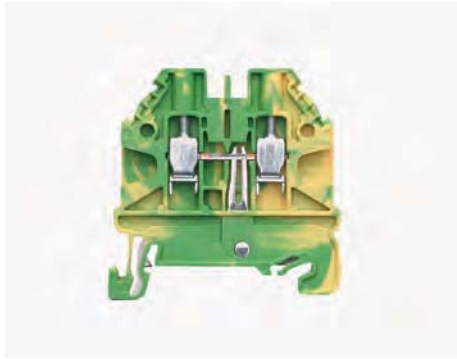

Description	Type	Part No.	Std. Pack
Ground block, green/yellow	WT 2,5 PE	58.503.9055.0	100
General data			
Width / length / height, incl. TS 7.5	5 mm / 48 mm / 48 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	0.14–4 mm ²		pending
Cross section solid/stranded	0.14–4 mm ²		
Cross section, AWG		26–12	26–12
Rated current			
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
Type		Part No.	Std. Pack
End plate	AP WT 2,5 - 10	07.313.2555.0	10

WT 4 PE

- Ground block with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
- Connection capacity: 2 wires, equal size 0.14 – 2.5 mm²



Description	Type	Part No.	Std. Pack
Ground block, green/yellow	WT 4 PE	58.504.9055.0	100
General data			
Width / length / height, incl. TS 7.5	6 mm / 48 mm / 48 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	0.14–6 mm ²		pending
Cross section solid/stranded	0.14–6 mm ²		
Cross section, AWG		26–10	26–10
Rated current			
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
Type		Part No.	Std. Pack
End plate	AP WT 2,5 - 10	07.313.2555.0	10

WT 6 PE

- Ground block with screw connection for mounting on TS 35
- Nominal cross section 6 mm²
- Connection capacity: 2 wires, equal size 0.2 – 4 mm²



Description	Type	Part No.	Std. Pack
Ground block, green/yellow	WT 6 PE	58.506.9055.0	100
General data			
Width / length / height, incl. TS 7.5	8 mm / 48 mm / 48 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	0.2–10 mm ²		pending
Cross section solid/stranded	0.2–10 mm ²		
Cross section, AWG		24–8	24–8
Rated current			
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
Type		Part No.	Std. Pack
End plate	AP WT 2,5 - 10	07.313.2555.0	10